

# PS2-150 BOOST-240

## Solar Surface Pump System

### System Overview

Head	max. 50 m
Flow rate	max. 0,98 m³/h

### Technical Data

#### Controller PS2-150

- Controlling and monitoring
- Control inputs for dry running protection, remote control etc.
- Protected against reverse polarity, overload and overtemperature
- Integrated MPPT (Maximum Power Point Tracking)
- Battery operation: Integrated low voltage disconnect

Power	max. 0,30 kW
Input voltage	max. 50 V
Optimum Vmp**	> 17 V
Motor current	max. 22 A
Efficiency	max. 98 %
Ambient temp.	-40...50 °C
Enclosure class	IP68

#### Motor ECDRIVE 150-BOOST

- Maintenance-free brushless DC motor
- Premium materials, stainless steel: AL/AISI 304
- No electronics in the motor

Rated power	0,30 kW
Efficiency	max. 92 %
Motor speed	280...1.750 rpm
Insulation class	F
Enclosure class	IPX4

#### Pump End PE BOOST-240

- Premium materials: brass
  - Centrifugal pump
- |            |           |
|------------|-----------|
| Efficiency | max. 59 % |
|------------|-----------|



#### Pump Unit PU BOOST-240 (Motor, Pump End)

Water temperature	max. 80 °C
Suction head	max. 3 m

### Standards



2006/42/EC, 2004/108/EC, 2006/95/EC

IEC/EN 61702:1995, IEC/EN 62253 Ed.1

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market requirements.

\*\*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature




## PS2-150 BOOST-240

Solar Surface Pump System

### Pump Chart


V<sub>mp</sub>\* > 17 V

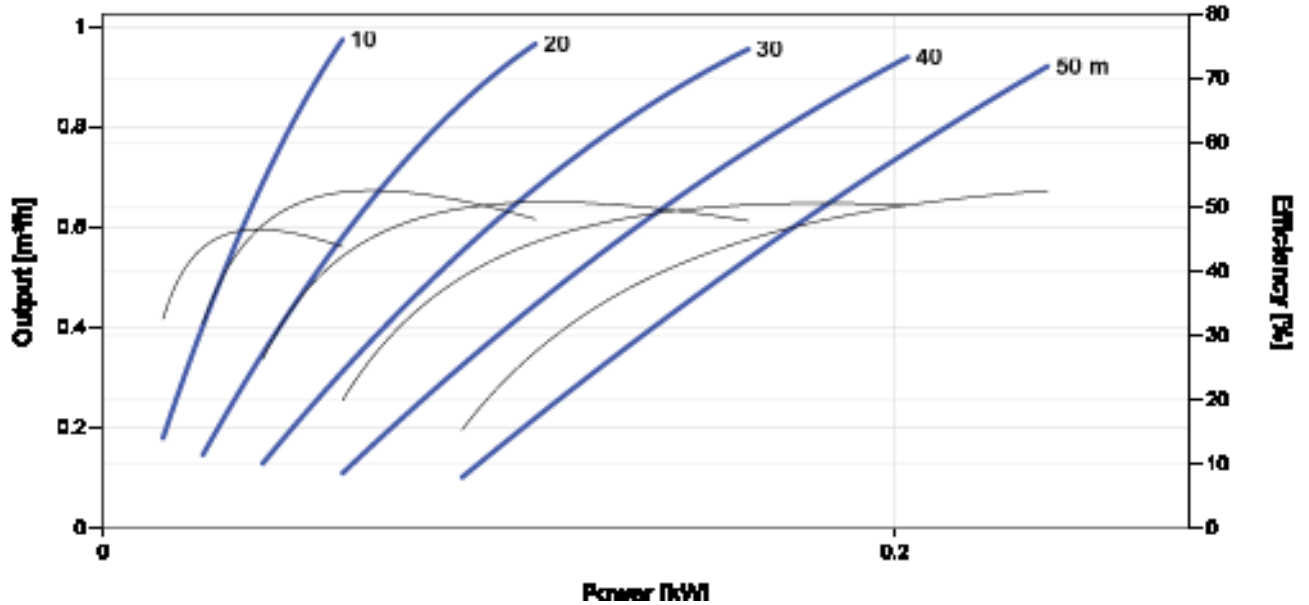


### Dimensions and Weights

#### Controller

- H1 = 352 mm
- H2 = 333 mm
- W1 = 207 mm
- W2 = 170 mm
- W3 = 164 mm
- D1 = 124 mm

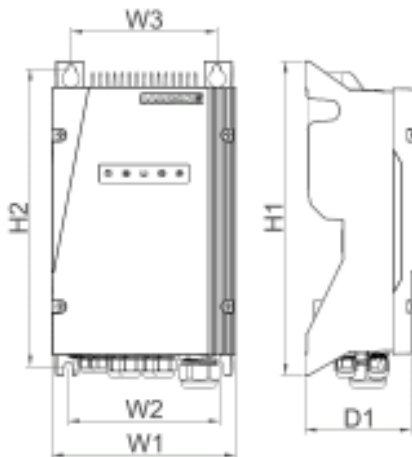

#### Pump Unit [mm]

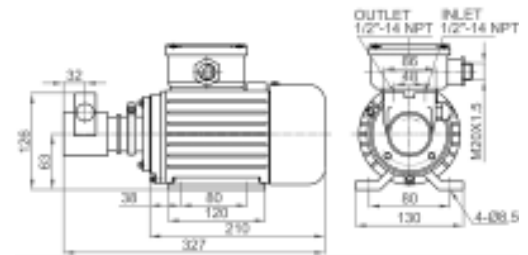

	Net weight
Controller	5,6 kg
Pump Unit	7,5 kg
Motor	5,5 kg
Pump End	2,0 kg

\*V<sub>mp</sub>: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

