

# PS2-150 C-SJ5-4

### Solar Submersible Pump System for 4" wells

## System Overview

Head max. 12 m Flow rate max. 6,1 m<sup>3</sup>/h

#### **Technical Data**

#### Controller PS2-150

- Controlling and monitoring
- Control inputs for dry running protection, remote control etc.
- Protected against reverse polarity, overload and overtemperature
- Integrated MPPT (Maximum Power Point Tracking)
- Battery operation: Integrated low voltage disconnect

max. 0,30 kW Input voltage max. 50 V Optimum Vmp\*\* > 17 V Motor current max. 22 A Efficiency max. 98 % -40...50 °C Ambient temp. Enclosure class IP68

#### Motor ECDRIVE 150-C

- Maintenance-free brushless DC motor
- Premium materials, stainless steel: AISI 304/316
- No electronics in the motor

Rated power 0,30 kW Efficiency max. 92 % Motor speed 900...3.300 rpm Insulation class F IP68 Enclosure class Submersion max. 150 m

#### Pump End PE C-SJ5-4

- Non-return valve
- Premium materials, stainless steel: AISI 304
- Centrifugal pump

Efficiency max. 48 %



#### Pump Unit PU150 C-SJ5-4 (Motor, Pump End)

Borehole diameter min. 4,0 in Water temperature max. 50 °C

#### **Standards**



2006/42/EC, 2004/108/EC, 2006/95/EC

IEC/EN 61702:1995, IEC/EN 62253 Ed.1

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market

\*\*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature









# PS2-150 C-SJ5-4


Solar Submersible Pump System for 4" wells

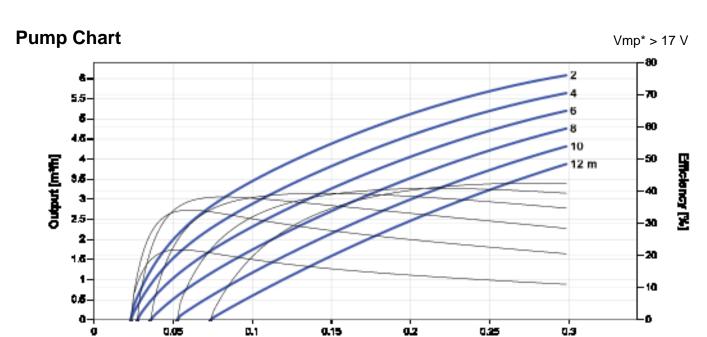


Penwer (kW)

## **Dimensions and Weights**





# A = 434 mm B = 185 mm C = 249 mm D = 96 mm E = 98 mm S = 1,5 in



	Net weight
Controller	5,6 kg
Pump Unit	10 kg
Motor	7,0 kg
Pump End	3,0 kg

<sup>\*</sup>Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

#### BERNT LORENTZ GmbH

Siebenstuecken 24, 24558 Henstedt-Ulzburg, Germany, Tel +49 (0)4193 8806-700, www.lorentz.de



