

# PSk2-100 C-SJ95-17

## Solar Submersible Pump System for 8" wells

### System Overview

Head	max. 300 m
Flow rate	max. 113 m <sup>3</sup> /h

### Technical Data

#### Controller PSk2-100

- High efficiency solar pump controller
- Inputs for water meter, pressure sensors, digital switches
- Simple configuration with LORENTZ PumpScanner Android™ App
- Onboard data logging and system monitoring
- Inbuilt applications for constant pressure, constant flow and daily amount
  - Integrated Sun Sensor
  - Active temperature management
  - Integrated MPPT (Maximum Power Point Tracking)

Power	max. 90 kW
Input voltage	max. 850 V
Optimum Vmp**	> 575 V
Motor current	max. 160 A
Efficiency	max. 98 %
Ambient temp.	-10...50 °C
Enclosure class	IP54

#### Motor AC DRIVE SUB 8" 75kW

- Highly efficient 3-phase AC motor
- Frequency: 30...51 Hz
- Premium materials, stainless steel: AISI 304
- No electronics in the motor

Efficiency	max. 84 %
Motor speed	1.690...2.905 rpm
Power factor	0,85
Insulation class	F
Enclosure class	IP68
Submersion	max. 150 m

#### Pump End PE C-SJ95-17

- Non-return valve
- Premium materials, stainless steel: AISI 304
- Centrifugal pump

Efficiency	max. 81 %
------------	-----------

#### Pump Unit PUK2-100 C-SJ95-17 (Motor, Pump End)

Borehole diameter	min. 8,0 in
Water temperature	max. 30 °C****

### Standards



2006/42/EC, 2004/108/EC, 2006/95/EC

IEC/EN 61702:1995, IEC/EN 62253 Ed.1

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market requirements.

\*\*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m<sup>2</sup> solar irradiance, 25 °C cell temperature

\*\*\*\*Special solutions available for >30 °C, please consult your distributor




## PSk2-100 C-SJ95-17

Solar Submersible Pump System for 8" wells

### Pump Chart


Vmp\* > 575 V

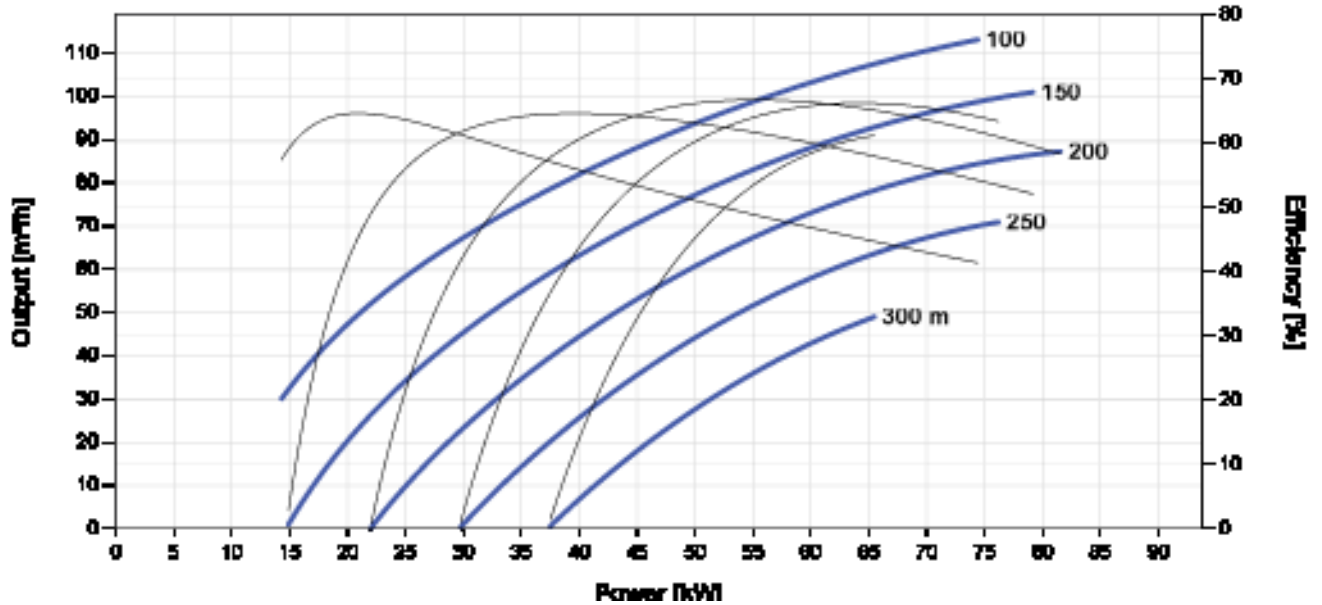

### Dimensions and Weights


#### Controller

H = 859 mm  
 H1 = 800 mm  
 H2 = 350 mm  
 W1 = 610 mm  
 W2 = 576 mm  
 D = 10 mm  
 D1 = 402 mm

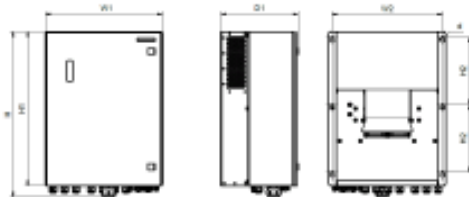

#### Pump Unit

A = 4.166 mm  
 B = 1.645 mm  
 C = 2.521 mm  
 D = 196 mm  
 E = 197 mm  
 S = 5 in

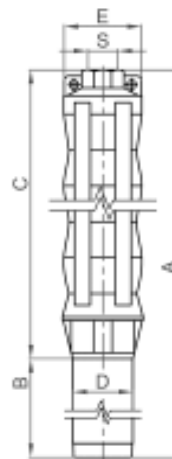

	Net weight
Controller	60 kg
Pump Unit	341 kg
Motor	211 kg
Pump End	130 kg

\*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

