

PSk2-60 C-SJ150-4-1

Solar Submersible Pump System for 10" wells

System Overview

Head	max. 80 m
Flow rate	max. 227 m ³ /h

Technical Data

Controller PSk2-60

- High efficiency solar pump controller
- Inputs for water meter, pressure sensors, digital switches
- Simple configuration with LORENTZ PumpScanner Android™ App
- Onboard data logging and system monitoring
- Inbuilt applications for constant pressure, constant flow and daily amount
 - Integrated Sun Sensor
- Active temperature management
- Integrated MPPT (Maximum Power Point Tracking)

Power	max. 58 kW
Input voltage	max. 850 V
Optimum Vmp**	> 575 V
Motor current	max. 95 A
Efficiency	max. 98 %
Ambient temp.	-10...50 °C
Enclosure class	IP54

Motor AC DRIVE SUB 8" 45kW

- Highly efficient 3-phase AC motor
- Frequency: 30...52 Hz
- Premium materials, stainless steel: AISI 304
- No electronics in the motor

Efficiency	max. 84 %
Motor speed	1.690...2.965 rpm
Power factor	0,85
Insulation class	F
Enclosure class	IP68
Submersion	max. 150 m

Pump End PE C-SJ150-4-1

- Non-return valve
- Premium materials, stainless steel: AISI 304
- Centrifugal pump

Efficiency	max. 79 %
------------	-----------

Pump Unit PUK2-60 C-SJ150-4-1 (Motor, Pump End)

Borehole diameter	min. 9,8 in
Water temperature	max. 30 °C****

Standards



2006/42/EC, 2004/108/EC, 2006/95/EC

IEC/EN 61702:1995, IEC/EN 62253 Ed.1

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market requirements.

**Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

****Special solutions available for >30 °C, please consult your distributor




PSk2-60 C-SJ150-4-1

Solar Submersible Pump System for 10" wells

Pump Chart


V_{mp}* > 575 V

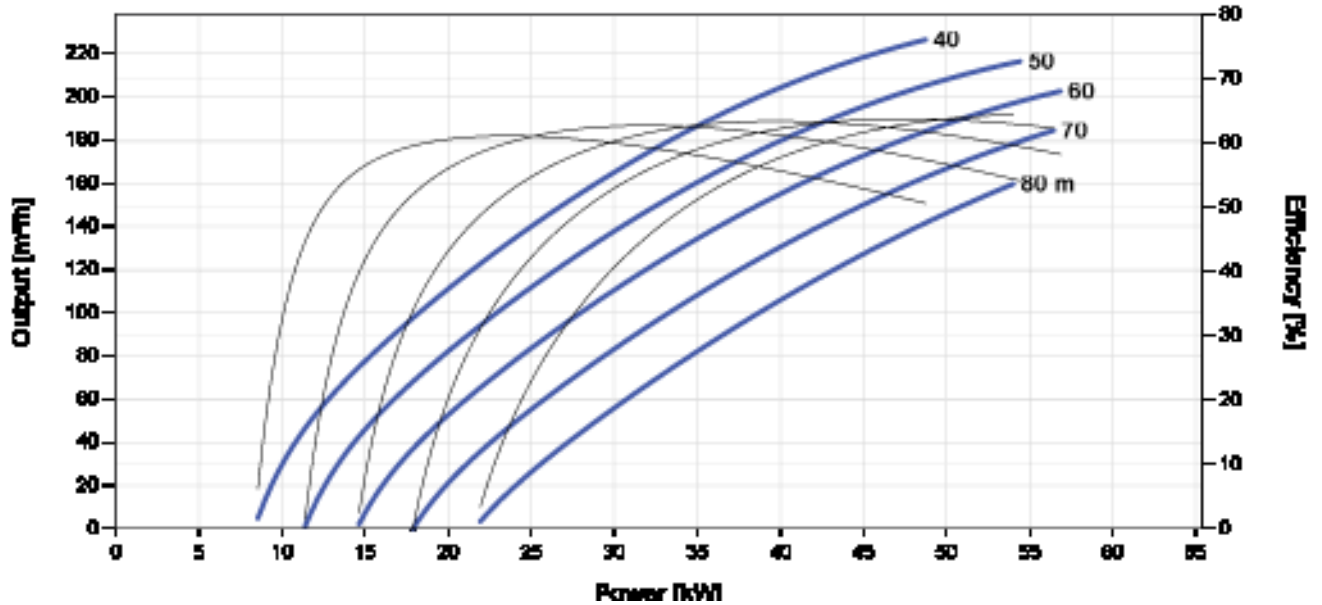

Dimensions and Weights


Controller

H = 859 mm
 H1 = 800 mm
 H2 = 350 mm
 W1 = 610 mm
 W2 = 576 mm
 D = 10 mm
 D1 = 402 mm

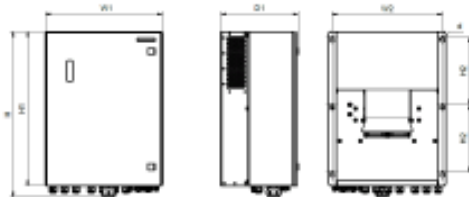

Pump Unit

A = 2.420 mm
 B = 1.380 mm
 C = 1.040 mm
 D = 196 mm
 E = 230 mm
 S = 6 in

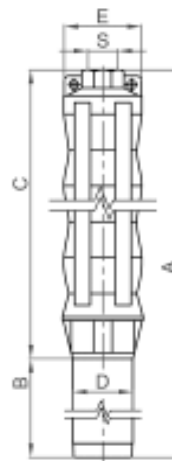

	Net weight
Controller	60 kg
Pump Unit	213 kg
Motor	160 kg
Pump End	53 kg

*V_{mp}: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

