


MY200M-24

High Efficiency, High Quality PV Module

Electrical Characteristics	MY200M-24
Maximum power (Pmax)	200W
Voltage at Pmax (Vmp)	35.2V
Current at Pmax (Imp)	5.35A
Open-circuit voltage (Voc)	44.0V
Short-circuit current (Isc)	6.10A
Temperature coefficient of Voc	-0.40 ± 0.05 %/°C
Temperature coefficient of Isc	(0.065 ± 0.01) %/°C
Temperature coefficient of power	-0.5 ± 0.06 %/°C
NOCT (Air 20°C; Sun 0.8kW/m ² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	600V DC
Power tolerance	+ 3%
Cells	multicrystalline silicon solar cell.
No. of cells and connections	72(6X12)
Module Dimension	1216mmx992mmx35mm
Weight	11.6kg[25.52lbs]


* STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C
 * Specifications are subject to change without notice at any time.

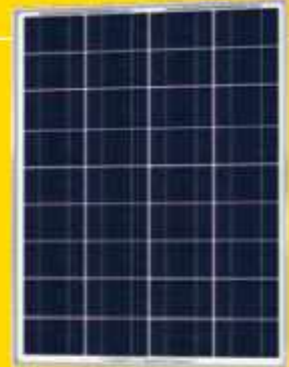


Key Features:

- High module efficiency and stable power output
- Based on leading process technology
- Outstanding electrical performance under high temperature conditions or low irradiance conditions
- Easy of installation and all-weather applications
- 5 years product warranty (materials and workmanship)
- 25 years module power output warranty
- Peak power of single module is guaranteed in +3% power tolerance
- Strong framed module, passing loaded test of 5400 Pa (IEC61215 2nd)
- The manufacture is certified for ISO 9001:2000

Module Diagram

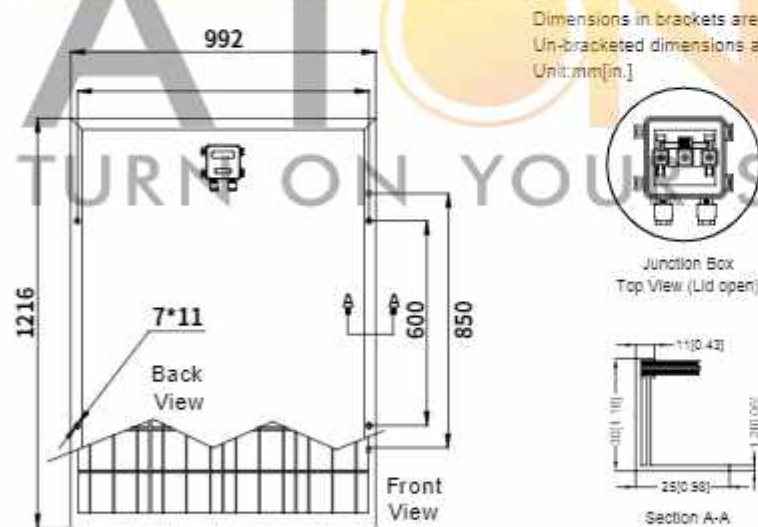

I-V Curves

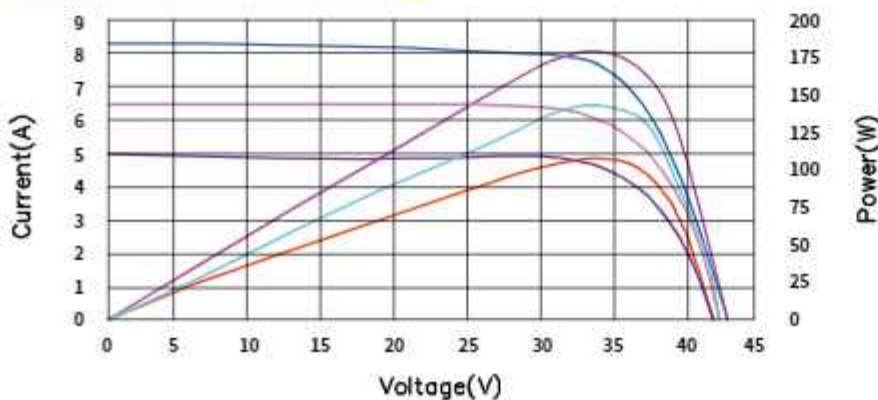

Product's Guarantee

- 5 years products life warranty
- 12 years module power output no less 90%
- 25 years module power output no less 80%

Applications

- Off grid residential roof-tops
- Off grid commercial/industrial roof-tops
- Rural area applications
- Solar power system
- Other off-grid applications